


Berminghammer Reverse Circulation Drill

Features

- Designed for Reverse Circulation Rock Drilling from 24" to 52" Diameter
- High Capacity Air and Discharge Swivels
- 100,000 ft-lbs Torque
- 140,000 lbs of crowd & pullout
- Integrated Lead Slide
- Pairs with H25 H28 L27 leads
- Pairs with DS18 DS20 DS22 RC String

Specs

Max Drill Torque	100,000	ft lbs	135	kNm
Drill Speed	2 to 17	rpm	2 to 17	rpm
Pullout	140,000	lbs	65	tonne
Crowd	140,000	lbs	65	tonne
Center Passage	9.75	in	248	mm
MAX Flow	106	gpm	400	l/min
MAX Pressure	4,600	psi	320	bar
Weight with Typical Slide	12,000	lbs	5,500	Kg

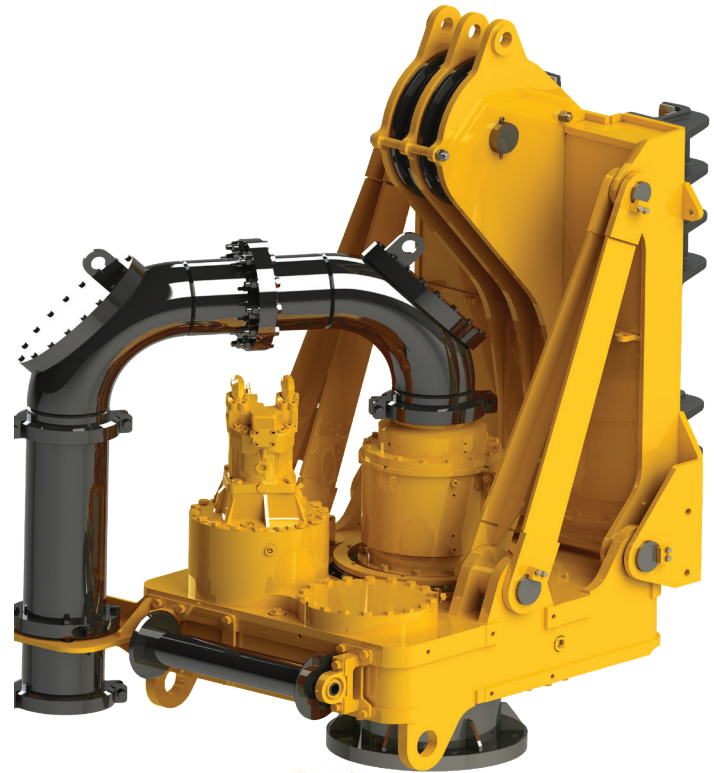

bfssales@berminghammer.com

