




## Berminghammer Reverse Circulation Drill

### Features

- Designed for Reverse Circulation Rock Drilling up to 24" Diameter
- High Capacity Air and Discharge Swivels
- 32,390 ft-lbs Torque
- 40,000 lbs of crowd & pullout
- Integrated Lead Slide
- Pairs with L18 L23 BL32 BL37 leads
- Pairs with DS18 HX9.4 String

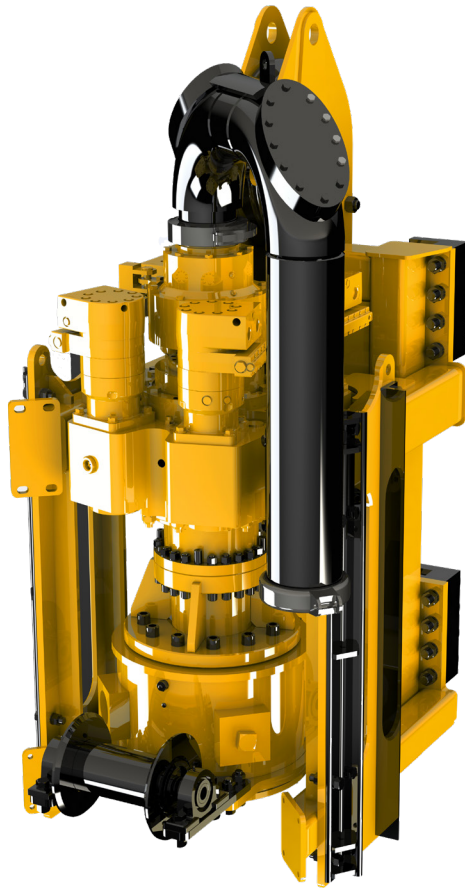

©Berminghammer Rev 1 - Subject to change without notice

### ⚙️ Specs

Max Drill Torque	32,390	ft lbs	43.92	kNm
Max Drill Speed	29	rpm	29	rpm
Pullout	40,000	lbs	18.2	tonne
Crowd	40,000	lbs	18.2	tonne
Center Passage	5.3	in	135	mm
MAX Flow	66	gpm	250	l/min
MAX Pressure	4,641	psi	320	bar
Weight with Typical Slide	5,500	lbs	2,500	Kg

[bfssales@berminghammer.com](mailto:bfssales@berminghammer.com)