


RC SWIVEL



Reverse Circulation Swivel

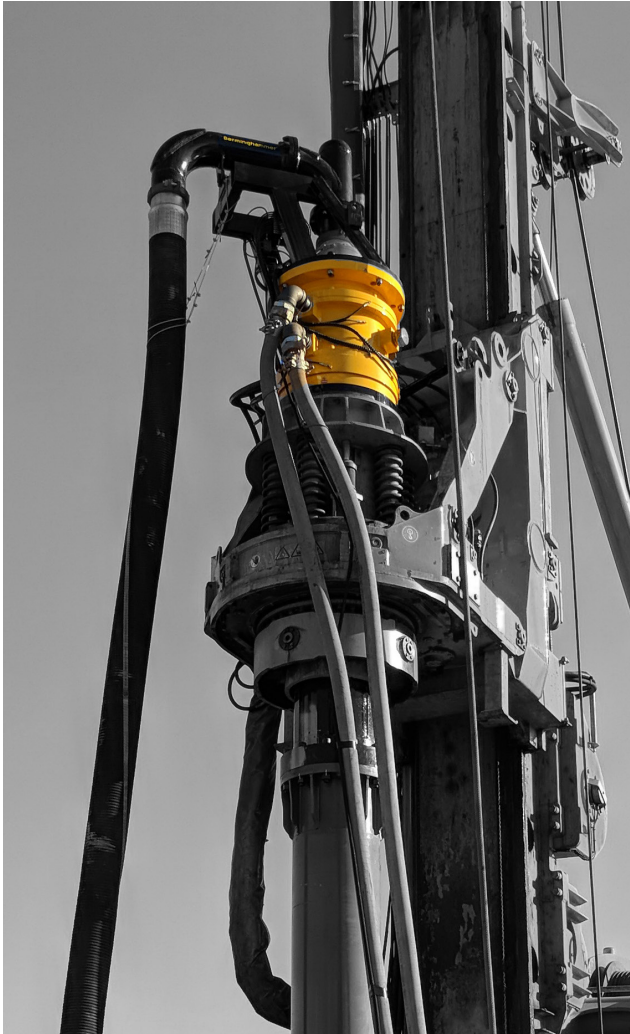

✦ Specs

RCS28

Max Torque	250,000	ft lbs	339	kNm
Drill Speed (From KDK)	50	rpm	50	rpm
Pullout	240,000	lbs	109	tonne
Crowd	240,000	lbs	109	tonne
Center Passage	7	in	178	mm
Max Air	5,000	cfm	141	m3/min
Weight with Typical Slide	10,000	lbs	4,536	Kg

Integrates with Berminghamammer DS20, DS22

RCS36

Max Torque	300,000	ft lbs	406	kNm
Drill Speed (From KDK)	50	rpm	50	rpm
Pullout	400,000	lbs	181	tonne
Crowd	400,000	lbs	181	tonne
Center Passage	12	in	305	mm
Max Air	7,000	cfm	198	m3/min
Weight with Typical Slide	11,000	lbs	4,990	Kg

Integrates with Berminghamammer DS20,DS22,DS24

Features

- Quickly Utilize Your Drill Rig to Drill Hard Rock
- Down-the-hole-hammer Drilling
- Cluster Drilling
- Drill Depths up to 200'
- Conventional Roller Bit Drilling
- Diameters up to 11'

