

Berminghammer



FOUNDATION EQUIPMENT

Twin Head Cutter



Features:

- Suitable for use in tunnelling applications
- Can move 45 degrees on both sides to reach difficult corners.
- Extremely large range of motion

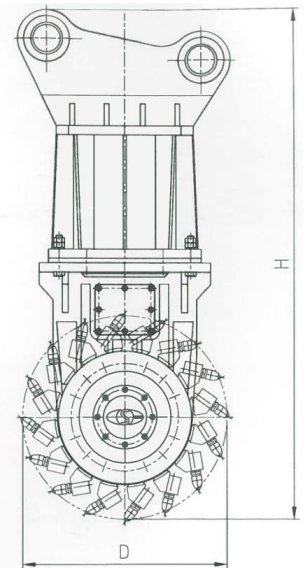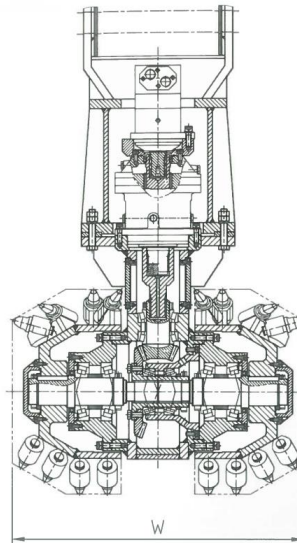

Specifications

Model	STW-06	STW-08	STW-10	STW-16	STW-20
Input power(Kw)	18	30	6	90	120
Operating pressure(bar)	250	250	250	250	250
Max. flow rate(ltr/min)	60	120	226	240	240
Max. cutting drum speed (rpm)	95	95	69	43	43
Max. cutting head turque(Nm)	2450	4750	12349	19335	32300
Weight(kg)	185	375	1150	1850	2000
Suitable excavator class (ton)	5	13	22	29	36
Cutting drum diameter [D](mm)	320	390	670	670	740
Height[H](mm)	1091	1218	1587	1587	1622
Cutting drum width [W] (mm)	600	700	950	950	1130

BERMINGHAM

FOUNDATION SOLUTIONS
SINCE 1897



Toll Free (Canada & USA 1.800.668.9432)

www.berminghammer.com | bfssales@berminghammer.com