


Birmingham

FOUNDATION EQUIPMENT

Casing Gate

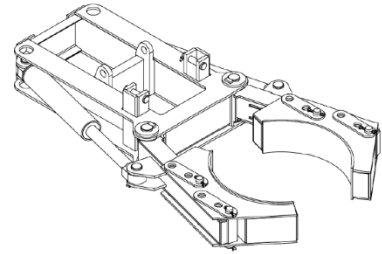

Compatibility BG 18, BG 20, BG 24, BG 28, BG 36

**Keep
your casing
vertical!**




Features

- Hydraulic Operation
- Pin-Adjustable Jaw Center
- Low Profile
- Easy Installation
- Robust Design
- Large Jaw Swing Angle

“For when verticality and plumbness are critical!”

“Keep your secants interlocked!”

“Minimize stress on the mast during travel”

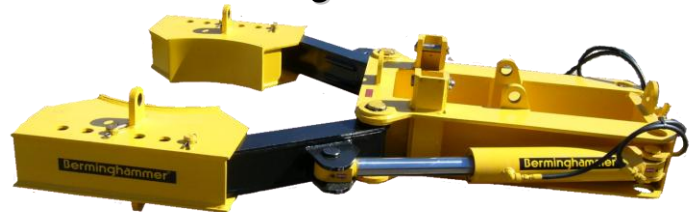

Operational Specifications

Hydraulic Requirements.....	10 gpm @ 2,500 psi (38 L/m @17 MPa)
Weight.....	2,200lbs (1,000 Kg)
Drill Centers (from lead face).....	35-7/16" (900mm)
	39-3/8" (1,000mm)
	43-5/16" (1,100mm)
	45-9/32" (1,150mm)
Overall Length	97-1/8" to 107" (2,467mm to 2,718mm)
Height (overall)	19" (283mm)

Note: Jack foot cannot be fully retracted with the gate installed

BERMINGHAM

**FOUNDATION SOLUTIONS
SINCE 1897**

Toll Free (Canada & USA 1.800.668.9432)

www.birmingham.com | bfssales@birmingham.com